

Door Hinges

Part No.	FC-306、FC-1132、FC-1332、FC-1336、FC-1238、FC-1230S、FC-201、FC-1424、FC-380 FC-1432、FC-1470、FC-1460、FC-1450、FC-8064-1、FC-650(3.5)、FC-650(4.0)、FC-650(5.0)
----------	--




Door Latches

Part No.	FC-1178、FC-1200、FC-1250、FC-1240、FC-1060、FC-1040、FC-1400、FC-1061、FC-3-0681 FC-3-0680、FC-4000、FC-4100、FC-4255
----------	--



Pressure Ventilator for Coldroom


Part No.	FC-110、FC-220
----------	---------------

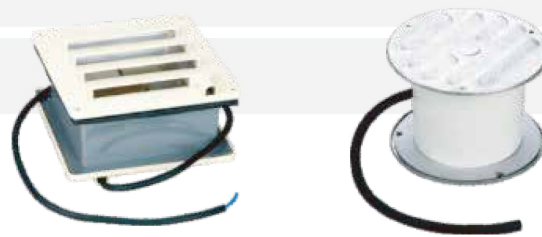

LED Light

Part No.	LED-401、LED-407、LED-409、LED-420、LED-501、LED-601、LED-1102
Mini Type No.	LED-3528-5009、LED-3528-1009、LED-3528-15009
Triangle Type No.	LED-3528-5010、LED-5050-5010、LED-3528-10010、LED-5050-10010、LED-3528-15010、LED-5050-15010、LED-3528-15009
U Type No.	LED-3528-5011、LED-5050-5011、LED-3528-10011、LED-5050-10011、LED-3528-15011、LED-5050-15011




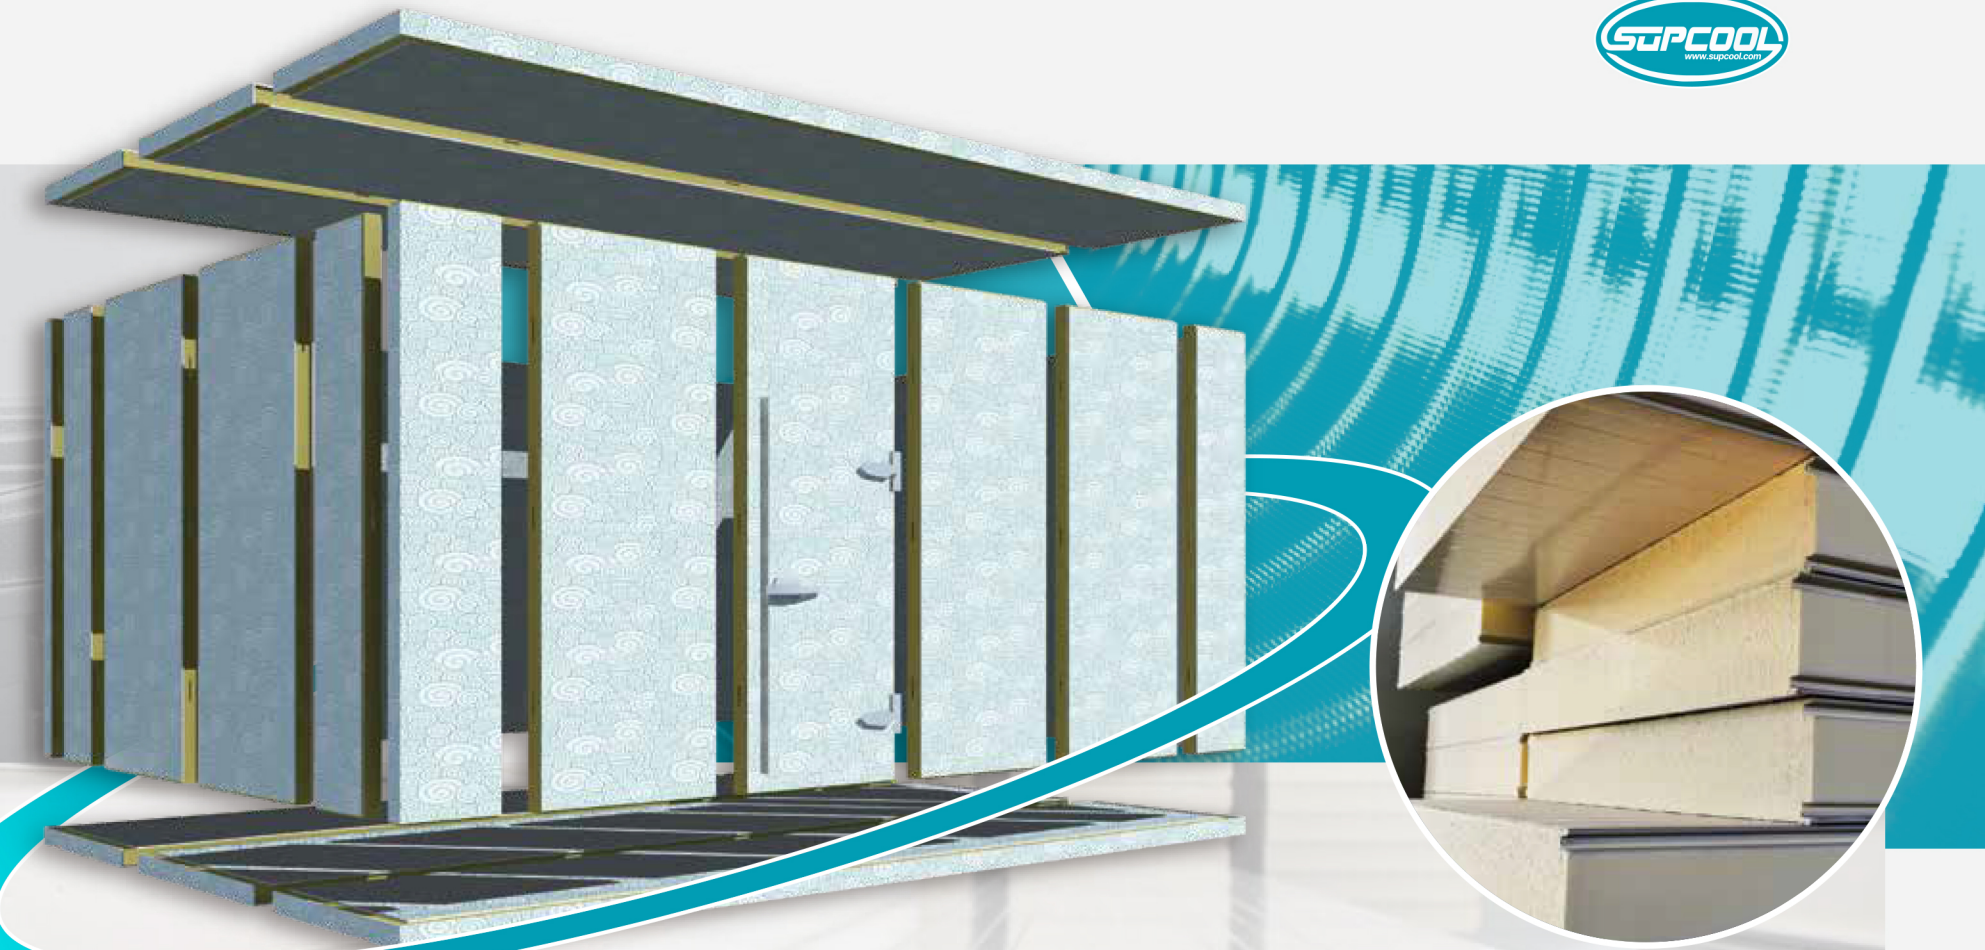

Cold Room

Product Description:

- Polyurethane sandwiched panels are of 100% polyurethane insulation, which is constructed by being foamed in place with retarded polyurethane using high pressure. Average density is 45kg/m³;
- The standard panel width is 960mm, the maximum lengths of panels are provided 6m till now. Also the thickness can reach 100mm/150mm;
- Besides the standard ones, customized panels are also available. As for the surface material, you can choose either one among stainless steel plate, painted galvanized mild steel and embossing aluminum plate;
- Every panel consists of tongue and groove construction and can be tightened by a number of eccentric fasteners, which may be screwed easily with a hexagonal key.

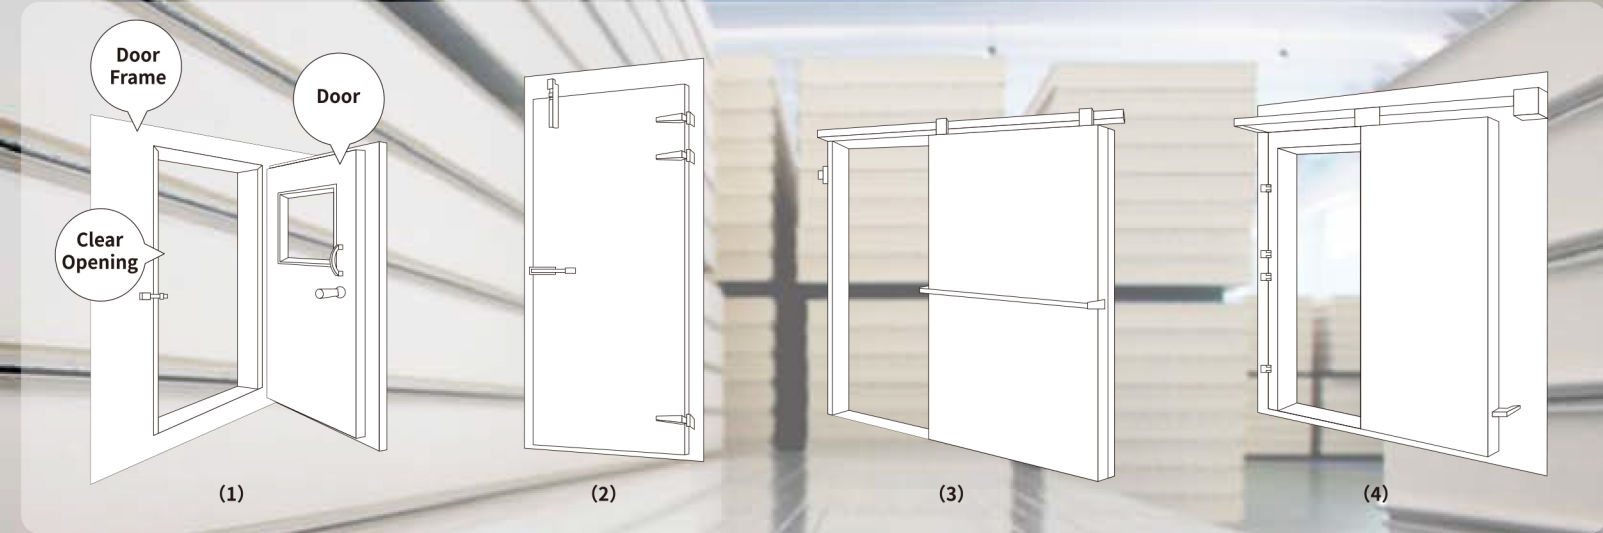

	Standard Hinged Door	
Part Model	L700	L900
Door Frame Dimension(mm)	790×1790	1000×2000
Clear Opening Dimension(mm)	700×1700	900×1900

**To be adjusted as per specific requirement
Heat insulation material: Polyurethane(Thickness:100mm) Surface Material: Painted Galvanized Mild Steel

	Standard Manuel Sliding Door			
Part Model	MS900×1040	MS1040×1180	MS1200×1340	MS1500×1640
Door Frame Dimension(mm)	1040×2040	1180×2040	1340×2140	1640×2140
Clear Opening Dimension(mm)	900×1900	1040×1900	1200×2000	1500×2000

	Automatically Swing Door	
Part Model	H700	H900
Door Frame Dimension(mm)	790×1790	1000×2000
Clear Opening Dimension(mm)	700×1700	900×1900

**To be adjusted as per specific requirement
Heat insulation material: Polyurethane(Thickness:100mm) Surface Material: Painted Galvanized Mild Steel

	Automatically Sliding Door			
Part Model	AS900×1040	AS1040×1180	AS1200×1340	AS1500×1640
Door Frame Dimension(mm)	1040×2040	1180×2040	1340×2140	1640×2140
Clear Opening Dimension(mm)	900×1900	1040×1900	1200×2000	1500×2000

**To be adjusted as per specific requirement
Heat insulation material: Polyurethane(Thickness:100mm) Surface Material: Painted Galvanized Mild Steel